


TECHNICAL DATA & SERVICE MANUAL

Euro-Line®

OUTDOOR UNIT: AER608SH
AER609SH
AER612SH

SPLIT SYSTEM AIR CONDITIONER

| Model No. | Product Code No. |
|-----------|------------------|
| AER608SH | 387007130 |
| AER609SH | 387007131 |
| AER612SH | 387007132 |

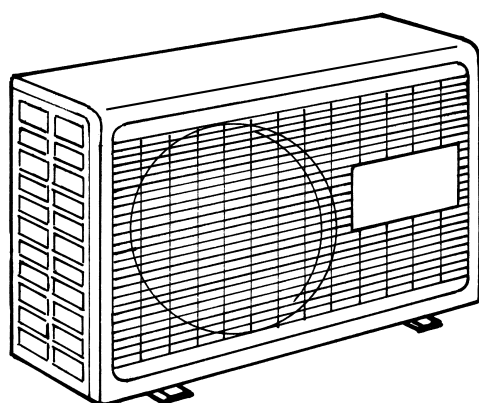

IMPORTANT! **Please read before installation**

This air conditioning system meets strict safety and operating standards.

For the installer or service person, it is important to install or service the system so that it operates safely and efficiently.

For safe installation and trouble-free operation, you must:

- Carefully read this instruction booklet before beginning.
- Follow each installation or repair step exactly as shown.
- Observe all local, state and national electrical codes.
- Pay close attention to all warning and caution notices given in this manual.
- The unit must be supplied with a dedicated electrical line.



WARNING

This symbol refers to a hazard or unsafe practice which can result in severe personal injury or death.



CAUTION

This symbol refers to a hazard or unsafe practice which can result in personal injury or product or property damage.

If necessary, get help

These instructions are all you need for most installation sites and maintenance conditions.

If you require help for a special problem, contact our sale/service outlet or your certified dealer for additional instructions.

In case of improper installation

The manufacturer shall in no way be responsible for improper installation or maintenance service, including failure to follow the instructions in this document.

SPECIAL PRECAUTIONS

- During installation, connect before the refrigerant system and then the wiring one; proceed in the reverse order when removing the units.

WARNING

When wiring



ELECTRICAL SHOCK CAN CAUSE SEVERE PERSONAL INJURY OR DEATH. ONLY A QUALIFIED, EXPERIENCED ELECTRICIANS SHOULD ATTEMPT TO WIRE THIS SYSTEM.

- Do not supply power to the unit until all wiring and tubing are completed or reconnected and checked, to ensure the grounding.
- Highly dangerous electrical voltages are used in this system. Carefully refer to the wiring diagram and these instructions when wiring. Improper connections and inadequate grounding can cause **accidental injury and death.**

- **Ground the unit** following local electrical codes.
- The Yellow/Green wire cannot be used for any connection different from the ground connection.
- Connect all wiring tightly. Loose wiring may cause overheating at connection points and a possible fire hazard.
- Do not allow wiring to touch the refrigerant tubing, compressor, or any moving parts of the fan.
- Do not use multi-core cable when wiring the power supply and control lines. Use separate cables for each type of line.

When transporting

Be careful when picking up and moving the indoor and outdoor units. Get a partner to help, and bend your knees when lifting to reduce strain on your back. Sharp edges or thin aluminium fins on the air conditioner can cut your fingers.

When installing...

... In a ceiling or wall

Make sure the ceiling/wall is strong enough to hold the unit-weight. It may be necessary to build a strong wooden or metal frame to provide added support.

... In a room

Properly insulate any tubing run inside a room to prevent "sweating", which can cause dripping and water damage to walls and floors.

... In moist or uneven locations

Use a raised concrete base to provide a solid level foundation for the outdoor unit.

This prevents damage and abnormal vibrations.

... In area with strong winds

Securely anchor the outdoor unit down with bolts and a metal frame. Provide a suitable air baffle.

... In a snowy area (for heat pump-type systems)

Install the outdoor unit on a raised platform that is higher than drifting snow. Provide snow vents.

When connecting refrigerant tubing

- Keep all tubing runs as short as possible.
- Use the flare method for connecting tubing.
- Apply refrigerant lubricant to the matching surfaces of the flare and union tubes before connecting them; screw by hand and then tighten the nut with a torque wrench for a leak-free connection.
- Check carefully for leaks before starting the test run.

NOTE:

Depending on the system type, liquid and gas lines may be either narrow or wide. Therefore, to avoid confusion, the refrigerant tubing for your particular model is specified as narrow tube for liquid, wide tube for gas.

When servicing

- Turn the power OFF at the main power board before opening the unit to check or repair electrical parts and wiring.
- Keep your fingers and clothing away from any moving parts.
- Clean up the site after the work, remembering to check that no metal scraps or bits of wiring have been left inside the unit being serviced.
- Ventilate the room during the installation or testing the refrigeration system; make sure that, after the installation, no gas leaks are present, because this could produce toxic gas and dangerous if in contact with flames or heat-sources.

Table of Contents

| | Page |
|------------------------------------|-----------|
| 1. OPERATING RANGE | 4 |
| <hr/> | |
| 2. SPECIFICATIONS | 5 |
| 2-1 Unit specifications | 5 |
| 2-2 Major Component specifications | 8 |
| 2-3 Other Component specifications | 11 |
| 3. DIMENSIONAL DATA | 12 |
| <hr/> | |
| 4. REFRIGERANT FLOW DIAGRAM | 13 |
| <hr/> | |
| 5. PERFORMANCE DATA | 15 |
| 5-1 Performance Charts | 15 |
| 5-2 Cooling Capacity | 18 |
| 5-3 Heating Capacity | 21 |
| 6. ELECTRICAL DATA | 22 |
| 6-1 Electrical characteristics | 22 |
| 6-2 Electric Wiring Diagram | 25 |
| 6-3 System Wiring Diagram | 25 |

1. OPERATING RANGE

| | Temperature | Indoor Air Intake Temp. | Outdoor Air Intake Temp. |
|---------|--------------------|--------------------------------|---------------------------------|
| Cooling | Maximum | 32°C D.B. / 23°C W.B. | 43°C D.B. |
| | Minimum | 19°C D.B. / 14°C W.B. | 19°C D.B. |
| Heating | Maximum | 27°C D.B. | 24°C D.B. / 18°C W.B. |
| | Minimum | - | -8°C D.B. / -9°C W.B. |

2. SPECIFICATIONS

2-1 Unit Specifications

AER608SH

| | |
|---------------------|-------------------|
| Power source | 220 - 240V ~ 50Hz |
|---------------------|-------------------|

| | |
|-----------------------|------|
| Voltage rating | 230V |
|-----------------------|------|

| Performance * | | AWR608HL | | Cooling | Heating |
|-------------------------|-------------------|-----------------|--|---------|---------|
| Capacity | kW | | | 2,30 | 2.65 |
| | BTU/h | | | 7843 | 9045 |
| Air circulation (High) | m ³ /h | | | 430 | |
| Moisture removal (High) | Liters/h | | | 0,9 | - |

| Electrical Rating | | Cooling | Heating |
|---------------------------------|-----|-----------|---------|
| Available voltage range | V | 198 ~ 264 | |
| Running amperes | A | 4.0 | 4.0 |
| Power input | W | 890 | 860 |
| Power factor | % | 97 | 94 |
| C.O.P. | W/W | 2.6 | 3.1 |
| Compressor locked rotor amperes | A | 20 | 20 |

| Features | | | | | |
|--|-------------|---------|--|-------------------|----|
| Fan speed | | | | 1(Hi) | |
| Compressor | | | | Rotary (Hermetic) | |
| Refrigerant / Amount charged at shipment | g | | | R407C / 770 | |
| Refrigerant control | | | | Capillary tube | |
| Operation Sound | Hi | | | 43 | 45 |
| Refrigerant tubing connections | | | | Flare type | |
| Max. allowable tubing length at shipment | m | | | 7.5 | |
| Refrigerant tube diameter | Narrow tube | mm(in.) | | 6,35 (1/4) | |
| | Wide tube | mm(in.) | | 9,52 (3/8) | |

| Dimensions & Weight | | | | | |
|--------------------------------|----------|----------------|--|------|--|
| Unit dimensions | Height | mm | | 540 | |
| | Width | mm | | 700 | |
| | Depth | mm | | 265 | |
| Package dimensions | Height | mm | | 568 | |
| | Width | mm | | 815 | |
| | Depth | mm | | 343 | |
| Weight | Net | kg | | 35.0 | |
| | Shipping | kg | | 38.0 | |
| Shipping volume | | m ³ | | 0.16 | |

DATA SUBJECT TO CHANGE WITHOUT NOTICE

Remarks:

Rating conditions are:

Cooling: Indoor air temperature 27°C D.B. / 19°C W.B.

Outdoor air temperature 35°C D.B. / 24°C W.B.

Heating: Indoor air temperature 20°C D.B.

Outdoor air temperature 7°C D.B. / 6°C W.B.

* For other INDOOR UNITS' MODELS, please refer to catalogue

AER609SH

| | |
|---------------------|-------------------|
| Power source | 220 - 240V ~ 50Hz |
|---------------------|-------------------|

| | |
|-----------------------|------|
| Voltage rating | 230V |
|-----------------------|------|

| Performance * | | AWR609HL | | Cooling | Heating |
|-------------------------|--|-------------------|-------|----------------|----------------|
| Capacity | | kW | | 2,50 | 3.40 |
| | | | BTU/h | 8532 | 11604 |
| Air circulation (High) | | m ³ /h | | 450 | |
| Moisture removal (High) | | Liters/h | | 1.1 | - |

| Electrical Rating | | Cooling | Heating |
|---------------------------------|-----|----------------|----------------|
| Available voltage range | V | 198 ~ 264 | |
| Running amperes | A | 4.7 | 4.7 |
| Power input | W | 1040 | 1050 |
| Power factor | % | 96 | 97 |
| C.O.P. | W/W | 2.4 | 3.2 |
| Compressor locked rotor amperes | A | 24 | 24 |

| Features | | | | | |
|--|-------------|---------|------|-------------------|----|
| Fan speed | | | | 1(Hi) | |
| Compressor | | | | Rotary (Hermetic) | |
| Refrigerant / Amount charged at shipment | | g | | R407C / 990 | |
| Refrigerant control | | | | Capillary tube | |
| Operation Sound | Hi | | dB-A | 43 | 45 |
| Refrigerant tubing connections | | | | Flare type | |
| Max. allowable tubing length at shipment | | | m | 7.5 | |
| Refrigerant tube diameter | Narrow tube | mm(in.) | | 6,35 (1/4) | |
| | Wide tube | mm(in.) | | 9,52 (3/8) | |

| Dimensions & Weight | | | | | |
|--------------------------------|----------|----------------|--|------|--|
| Unit dimensions | Height | mm | | 540 | |
| | Width | mm | | 700 | |
| | Depth | mm | | 265 | |
| Package dimensions | Height | mm | | 568 | |
| | Width | mm | | 815 | |
| | Depth | mm | | 343 | |
| Weight | Net | kg | | 35.0 | |
| | Shipping | kg | | 38.0 | |
| Shipping volume | | m ³ | | 0.16 | |

DATA SUBJECT TO CHANGE WITHOUT NOTICE

Remarks:

Rating conditions are:

Cooling: Indoor air temperature 27°C D.B. / 19°C W.B.

Outdoor air temperature 35°C D.B. / 24°C W.B.

Heating: Indoor air temperature 20°C D.B.

Outdoor air temperature 7°C D.B. / 6°C W.B.

* For other INDOOR UNITS' MODELS, please refer to catalogue

AER612SH

| | |
|---------------------|-------------------|
| Power source | 220 - 240V ~ 50Hz |
|---------------------|-------------------|

| | |
|-----------------------|------|
| Voltage rating | 230V |
|-----------------------|------|

| Performance * | | AWR612HL | | Cooling | Heating |
|-------------------------|--|-------------------|-------|----------------|----------------|
| Capacity | | kW | | 3,10 | 4.10 |
| | | | BTU/h | 10580 | 13993 |
| Air circulation (High) | | m ³ /h | | 470 | |
| Moisture removal (High) | | Liters/h | | 1.5 | - |

| Electrical Rating | | Cooling | Heating |
|---------------------------------|-----|----------------|----------------|
| Available voltage range | V | 198 ~ 264 | |
| Running amperes | A | 6.2 | 6.6 |
| Power input | W | 1300 | 1400 |
| Power factor | % | 91 | 92 |
| C.O.P. | W/W | 2.4 | 2.9 |
| Compressor locked rotor amperes | A | 33 | 33 |

| Features | | | | | |
|--|-------------|---------|------|-------------------|----|
| Fan speed | | | | 1(Hi) | |
| Compressor | | | | Rotary (Hermetic) | |
| Refrigerant / Amount charged at shipment | | g | | R407C / 1150 | |
| Refrigerant control | | | | Capillary tube | |
| Operation Sound | Hi | | dB-A | 45 | 47 |
| Refrigerant tubing connections | | | | Flare type | |
| Max. allowable tubing length at shipment | | | m | 7.5 | |
| Refrigerant tube diameter | Narrow tube | mm(in.) | | 6,35 (1/4) | |
| | Wide tube | mm(in.) | | 12,7 (1/2) | |

| Dimensions & Weight | | | | | |
|--------------------------------|----------|----------------|--|------|--|
| Unit dimensions | Height | mm | | 540 | |
| | Width | mm | | 700 | |
| | Depth | mm | | 265 | |
| Package dimensions | Height | mm | | 568 | |
| | Width | mm | | 815 | |
| | Depth | mm | | 343 | |
| Weight | Net | kg | | 35.0 | |
| | Shipping | kg | | 38.0 | |
| Shipping volume | | m ³ | | 0.16 | |

DATA SUBJECT TO CHANGE WITHOUT NOTICE

Remarks:

Rating conditions are:

Cooling: Indoor air temperature 27°C D.B. / 19°C W.B.

Outdoor air temperature 35°C D.B. / 24°C W.B.

Heating: Indoor air temperature 20°C D.B.

Outdoor air temperature 7°C D.B. / 6°C W.B.

* For other INDOOR UNITS' MODELS, please refer to catalogue

2-2 Major Component Specifications

Outdoor Unit: **AER608SH**

| Compressor | | | |
|--------------------------------------|-----------------|---------------------|---------|
| Type | | Rotary (Hermetic) | |
| Compressor model | | 80225245F C-RN75H5A | |
| Nominal output | W | 750 | |
| Compressor oil...Amount | cc. | FV68S...470 | |
| Coil resistance (Ambient temp. 25°C) | Ω | C-R: 3.38 | |
| | | C-S: 7.49 | |
| Overload relay | | External (OLR T) | |
| Safety devices | Type | CS-7C115 | |
| | Operating Temp. | Open °C | 115 ± 3 |
| | | Close °C | 95 ± 5 |
| Run capacitor | μF | 20 | |
| | VAC | 400 | |

| Fan & Fan Motor | | | |
|--|-----------------|-------------------|---------|
| Type | | Propeller | |
| Q'ty Dia. | | 1... Ø 370 | |
| Fan motor model...Q'ty | | UE6-21ST5P...1 | |
| No. Of poles...rpm (230 V, High) | | 6...832 | |
| Nominal output | W | 25.05 | |
| Coil resistance (Ambient temp. 25 °C) | Ω | BRN-WHT: 242.4 | |
| | | WHT-YEL: 408.1 | |
| Safety devices | Type | Thermal protector | |
| | Operating temp. | Open °C | 130 ± 5 |
| | | Close °C | 83 ± 15 |
| Run capacitor | μF | 1.5 | |
| | VAC | 450 | |

| Heat Exch. Coil | | |
|------------------------|----------------|-----------------------------------|
| Coil | | Aluminium plate fin / Copper tube |
| Rows | | 1 |
| Fin pitch | mm | 1.3 |
| Face area | m ² | 0.353 |

| | |
|------------------------|--------------------------------|
| External Finish | Acrylic baked-on enamel finish |
|------------------------|--------------------------------|

DATA SUBJECT TO CHANGE WITHOUT NOTICE

Outdoor Unit: **AER609SH**

| Compressor | | |
|--------------------------------------|----------------------|------------------------|
| Type | | Rotary (Hermetic) |
| Compressor model | | 80228345 C-RN90H5B |
| Nominal output | W | 900 |
| Compressor oil...Amount | cc. | FV68S...470 |
| Coil resistance (Ambient temp. 25°C) | Ω | C-R: 3.07 C-S: 6.69 |
| Overload relay | | External (OLR T) |
| Safety devices | Type | CS-7C115 |
| | Operating Temp. Open | °C 115 ± 3 |
| | Close | °C 95 ± 5 |
| Run capacitor | μF | 25 |
| | VAC | 400 |

| Fan & Fan Motor | | |
|--|----------------------|----------------------------------|
| Type | | Propeller |
| Q'ty Dia. | | 1... Ø 370 |
| Fan motor model...Q'ty | | UE6-21ST5P...1 |
| No. Of poles...rpm (230 V, High) | | 6...832 |
| Nominal output | W | 25.05 |
| Coil resistance (Ambient temp. 25 °C) | Ω | BRN-WHT: 242.4 WHT-YEL: 408.1 |
| Safety devices | Type | Thermal protector |
| | Operating temp. Open | °C 130 ± 5 |
| | Close | °C 83 ± 15 |
| Run capacitor | μF | 1.5 |
| | VAC | 450 |

| Heat Exch. Coil | | |
|------------------------|----------------|-----------------------------------|
| Coil | | Aluminium plate fin / Copper tube |
| Rows | | 1 |
| Fin pitch | mm | 1.2 |
| Face area | m ² | 0.353 |

| | |
|------------------------|--------------------------------|
| External Finish | Acrylic baked-on enamel finish |
|------------------------|--------------------------------|

Outdoor Unit: **AER612SH**

| Compressor | | | | |
|--------------------------------------|----------------------|-------------|----|---------|
| Type | Rotary (Hermetic) | | | |
| Compressor model | 80235645B C-RN110H5B | | | |
| Nominal output | W | 1100 | | |
| Compressor oil...Amount | cc. | FV68S...520 | | |
| Coil resistance (Ambient temp. 25°C) | Ω | C-R: 1.962 | | |
| | | C-S: 5.38 | | |
| Overload relay | External (OLR T) | | | |
| Safety devices | Type | CS-7C115 | | |
| | Operating Temp. | Open | °C | 115 ± 3 |
| | | Close | °C | 95 ± 5 |
| Run capacitor | μF | 25 | | |
| | VAC | 400 | | |

| Fan & Fan Motor | | | | |
|--|-----------------|-------------------|----|---------|
| Type | Propeller | | | |
| Q'ty Dia. | 1... Ø 370 | | | |
| Fan motor model...Q'ty | UE6-21ST5P...1 | | | |
| No. Of poles...rpm (230 V, High) | 6...832 | | | |
| Nominal output | W | 25.05 | | |
| Coil resistance (Ambient temp. 25 °C) | Ω | BRN-WHT: 242.4 | | |
| | | WHT-YEL: 408.1 | | |
| Safety devices | Type | Thermal protector | | |
| | Operating temp. | Open | °C | 130 ± 5 |
| | | Close | °C | 83 ± 15 |
| Run capacitor | μF | 1.5 | | |
| | VAC | 450 | | |

| Heat Exch. Coil | | | |
|------------------------|-----------------------------------|-------|--|
| Coil | Aluminium plate fin / Copper tube | | |
| Rows | 2 | | |
| Fin pitch | mm | 1.4 | |
| Face area | m ² | 0.333 | |

| | |
|------------------------|--------------------------------|
| External Finish | Acrylic baked-on enamel finish |
|------------------------|--------------------------------|

2-3 Other Component Specifications

AER608SH

| 4-way Valve (20S) | | SRF-01AJ504D1 (Coil) STF-0101Z (Valve) |
|-------------------|--------------------|--|
| Coil rating | | AC 220/240 V, 50 Hz, 6W |
| Coil resistance | Ω (at 20°C) | 1402 \pm 7% |


AER609SH

| 4-way Valve (20S) | | SRF-01AJ504D1 (Coil) STF-0101Z (Valve) |
|-------------------|--------------------|--|
| Coil rating | | AC 220/240 V, 50 Hz, 6W |
| Coil resistance | Ω (at 20°C) | 1402 \pm 7% |

AER612SH


| 4-way Valve (20S) | | SRF-01AJ504D1 (Coil) STF-0201Z (Valve) |
|-------------------|--------------------|--|
| Coil rating | | AC 220/240 V, 50 Hz, 6W |
| Coil resistance | Ω (at 20°C) | 1402 \pm 7% |

3. DIMENSIONAL DATA

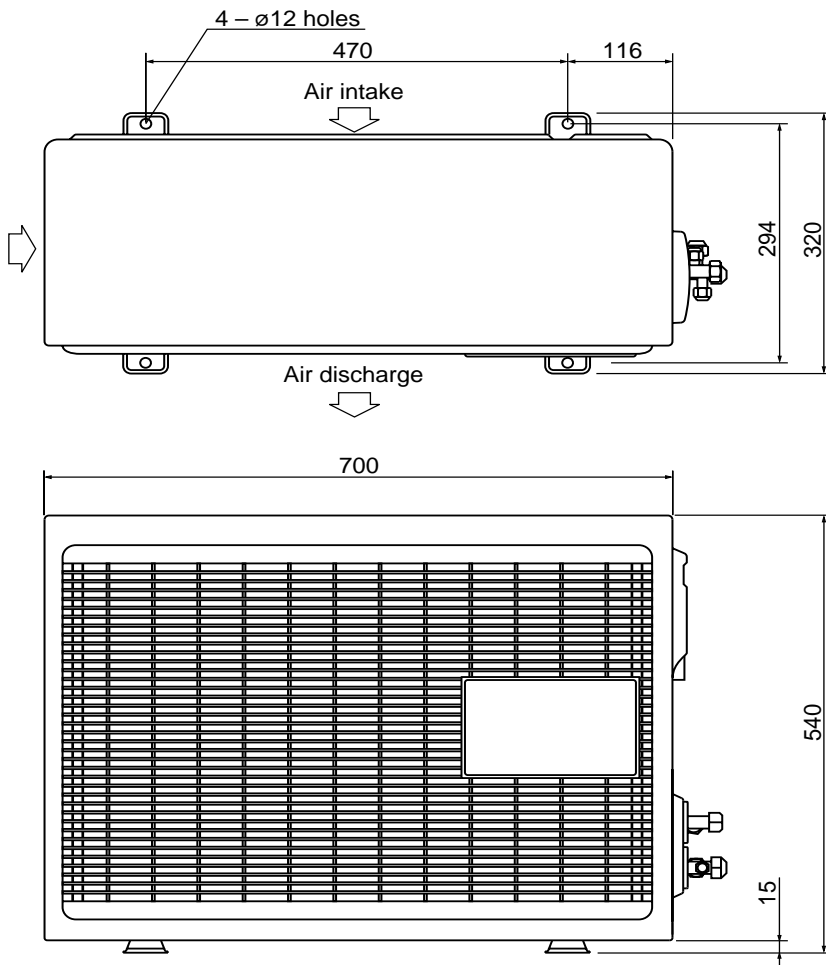

Wide tube service valve
 $\varnothing 9.52$ (3/8") 7000/9000 BTU/h
 $\varnothing 12.7$ (1/2") 12000 BTU/h

Narrow tube service valve
 $\varnothing 6.35$ (1/4")

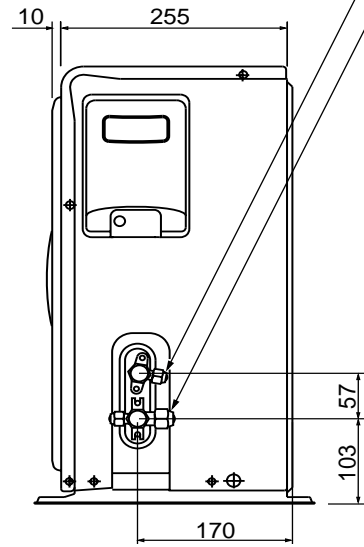


Unit : mm

4. REFRIGERANT FLOW DIAGRAM

Indoor Unit:

Outdoor Unit:


AER608SH

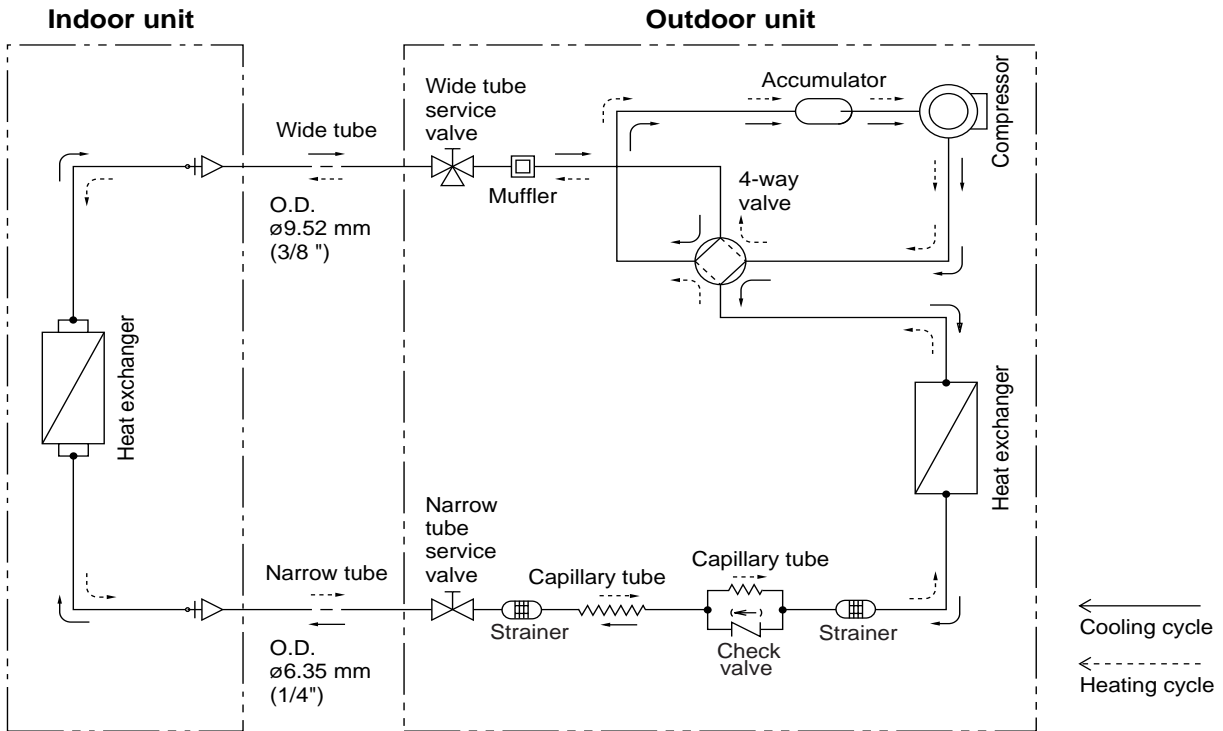

Indoor Unit:


Outdoor Unit:

AER609SH

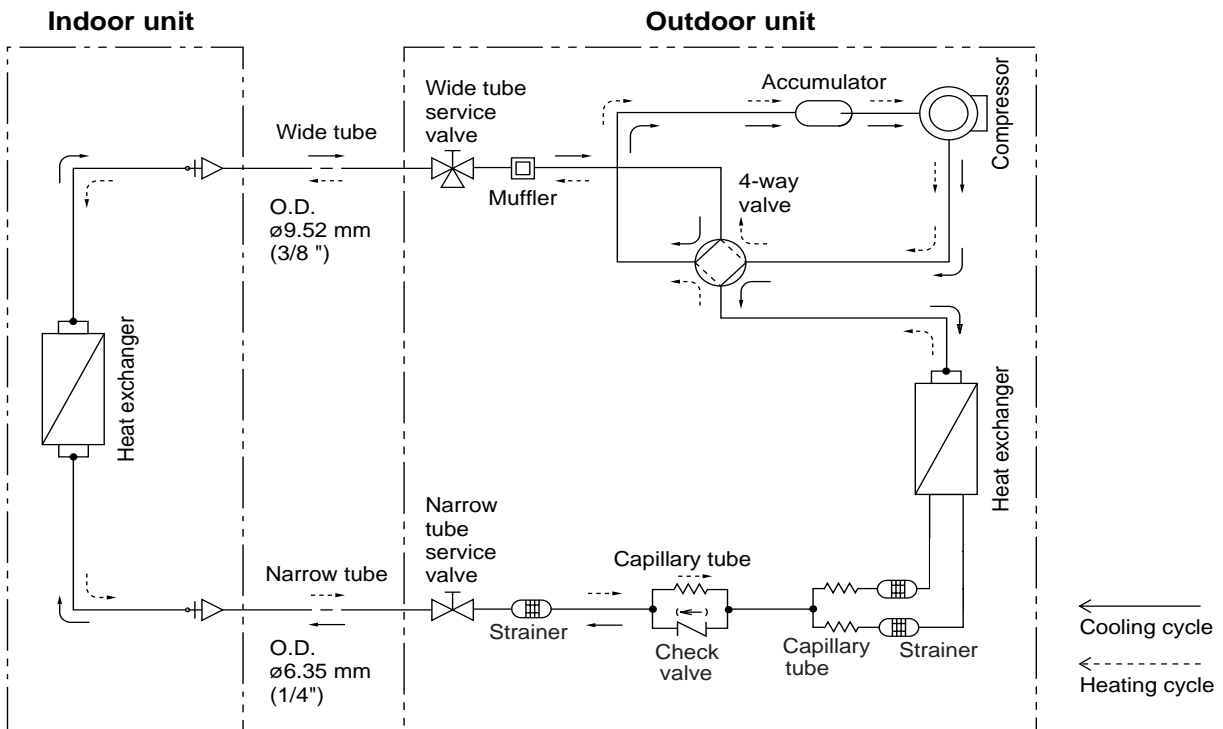

Indoor Unit:

Outdoor Unit: **AER612SH**

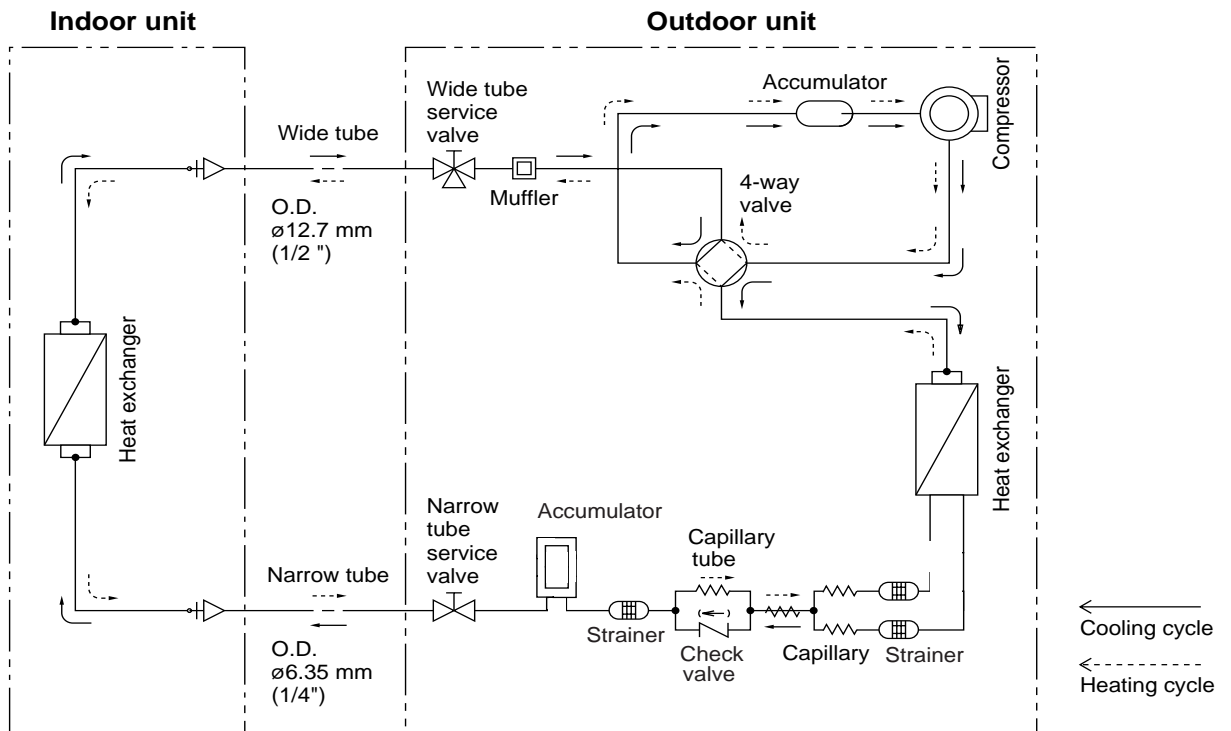

Insulation of Refrigerant Tubing


IMPORTANT

Because capillary tubing is used in the outdoor unit, both the wide and narrow tubes of this air conditioner become cold. To prevent heat loss and wet floors due to dripping of condensation, **both tubes must be well insulated** with a proper insulation material. The thickness of the insulation should be a min. 8 mm.



CAUTION

After a tube has been insulated, never try to bend it into a narrow curve because it can cause the tube to break or crack.

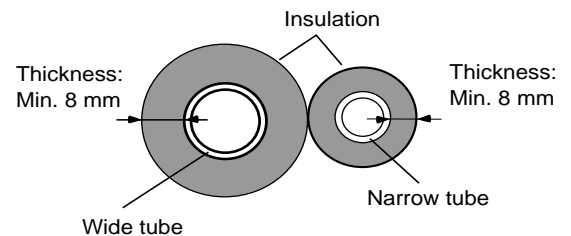


5. PERFORMANCE DATA




5-1 Performance charts

AER608SH

■ Cooling Characteristics

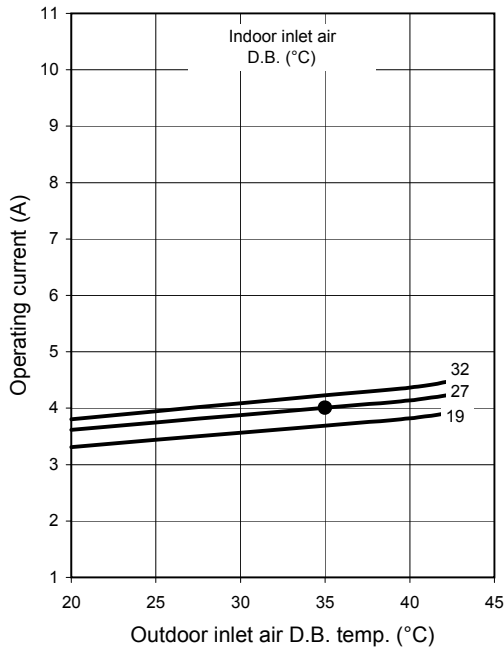

■ Heating Characteristics

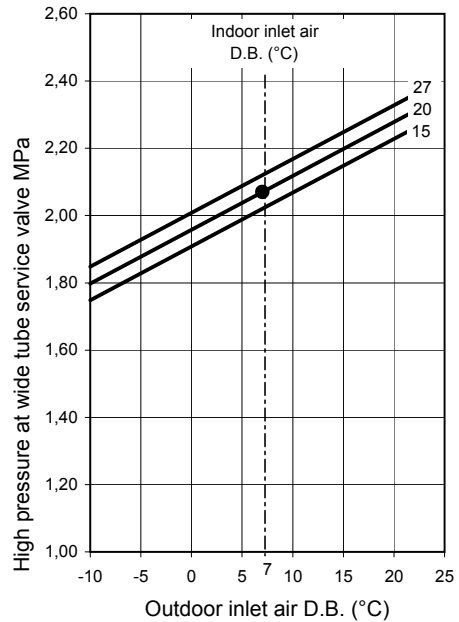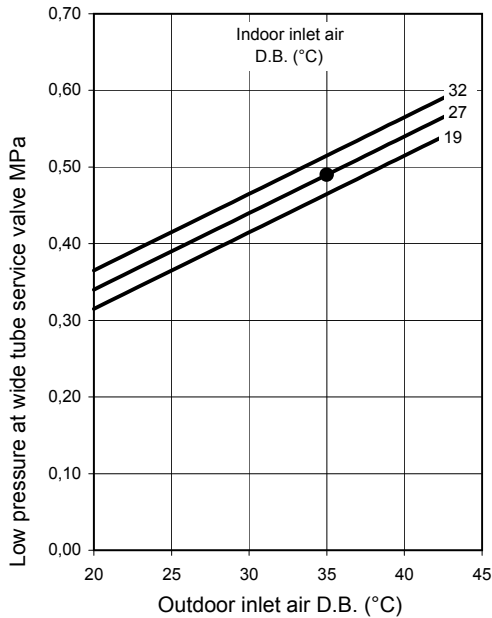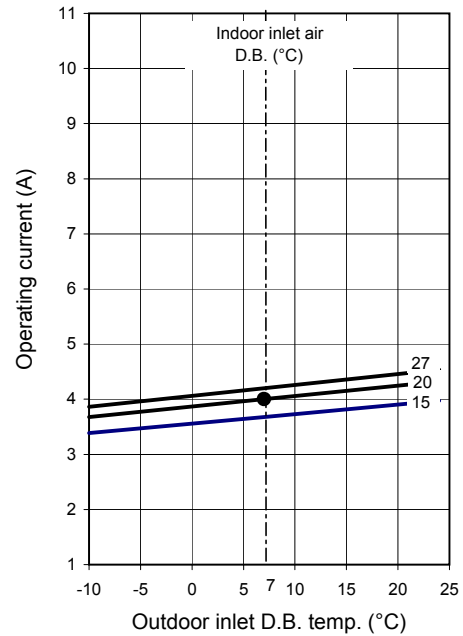

Notes:


Overload prevention operates to protect the air conditioner when outdoor ambient temperature reaches extremely high values in heating mode.

- Points of Rating condition




Data referred to AWR608HL

AER609SH

■ Cooling Characteristics

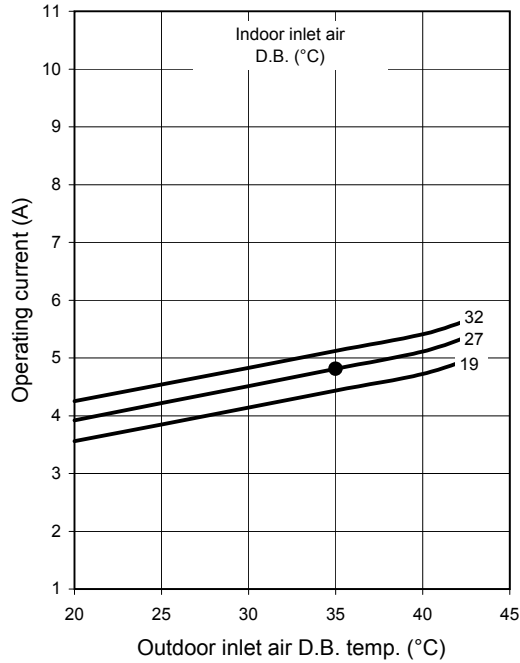

■ Heating Characteristics

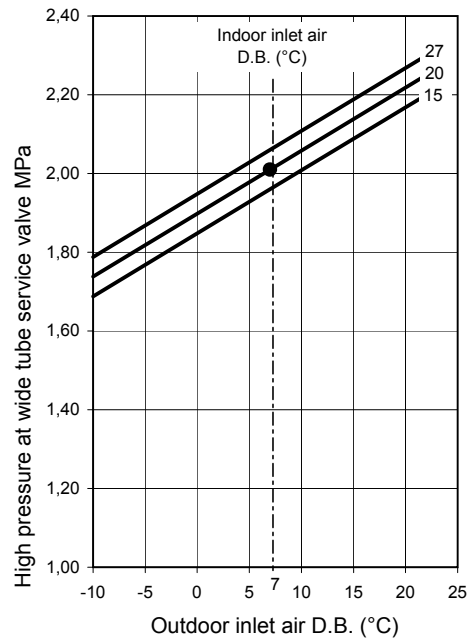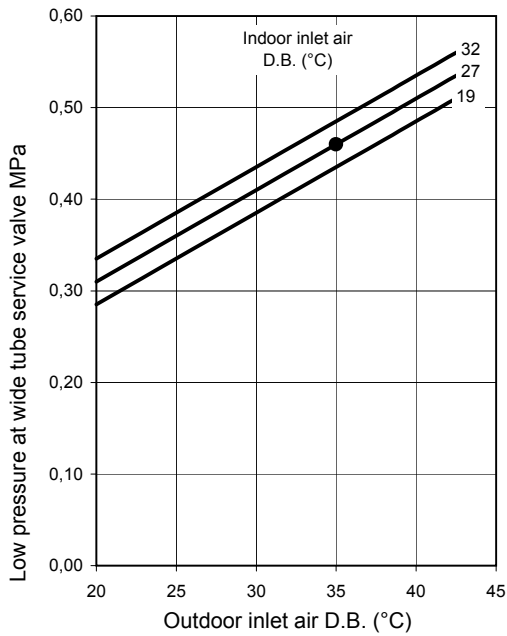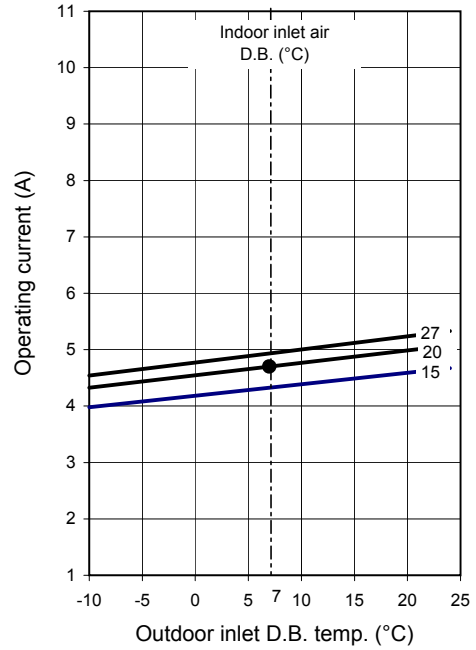

Notes:


Overload prevention operates to protect the air conditioner when outdoor ambient temperature reaches extremely high values in heating mode.

- Points of Rating condition




Data referred to AWR609HL

AER612SH

■ Cooling Characteristics

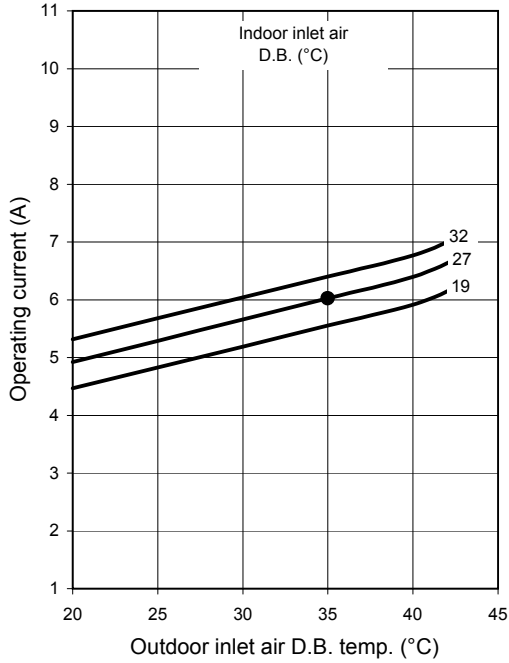

■ Heating Characteristics

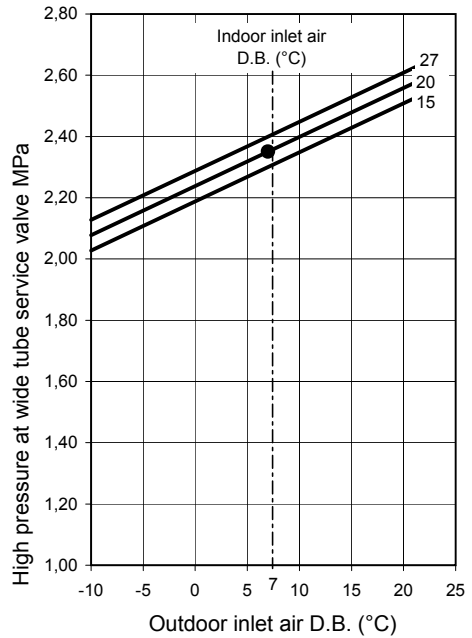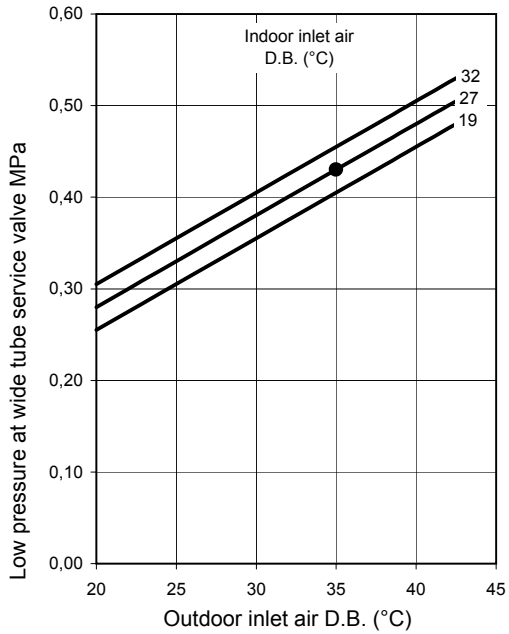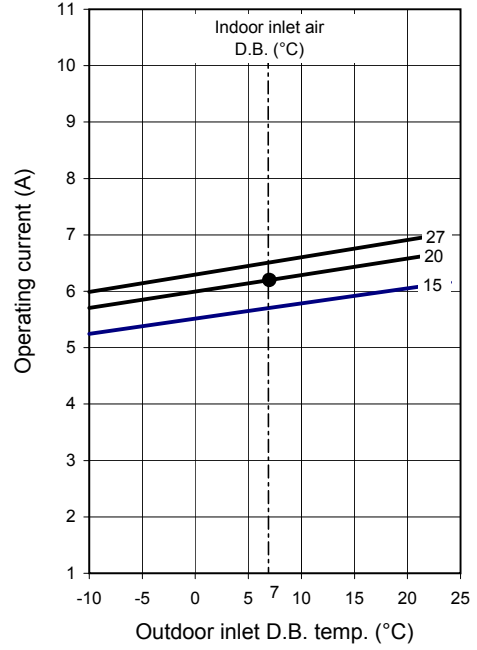

Notes:

Overload prevention operates to protect the air conditioner when outdoor ambient temperature reaches extremely high values in heating mode.

- Points of Rating condition

Data referred to AWR612HL

5-2 Cooling Capacity

OUTDOOR UNIT: **AER608SH**

INDOOR UNIT: **AWR608HL**

220 - 240V ~ 50Hz

| | | | | | | | | |
|-------------------|------|-----------------------|--------------------------|------|----------|------|------|------|
| RATING CAPACITY | | 2,30 kW | moisture removal | | 0,9 l/h | | | |
| COMP. POWER INPUT | | 0,802 kW | max comp input | | 0,902 kW | | | |
| AIR FLOW RATE | | 430 m ³ /h | | | | | | |
| EVAPORATOR | | | CONDENSER | | | | | |
| ENT.TEMP. °C | | | OUTDOOR AMBIENT TEMP. °C | | | | | |
| W.B. | D.B. | | 20 | 25 | 30 | 35 | 40 | 43 |
| 15 | | TC | 2,32 | 2,18 | 2,12 | 2,02 | 1,89 | 1,75 |
| | | CM | 0,68 | 0,70 | 0,73 | 0,75 | 0,78 | 0,81 |
| | 21 | SHC | 1,61 | 1,49 | 1,47 | 1,42 | 1,36 | 1,29 |
| | 23 | SHC | 1,82 | 1,69 | 1,66 | 1,61 | 1,55 | 1,48 |
| | 25 | SHC | 2,02 | 1,89 | 1,85 | 1,80 | 1,74 | 1,67 |
| | 27 | SHC | 2,23 | 2,09 | 2,05 | 2,00 | 1,89 | 1,75 |
| | 29 | SHC | 2,32 | 2,18 | 2,12 | 2,02 | 1,89 | 1,75 |
| 17 | | TC | 2,49 | 2,36 | 2,27 | 2,16 | 2,03 | 1,87 |
| | | CM | 0,70 | 0,73 | 0,75 | 0,78 | 0,80 | 0,83 |
| | 21 | SHC | 1,39 | 1,31 | 1,27 | 1,22 | 1,16 | 1,09 |
| | 23 | SHC | 1,60 | 1,50 | 1,46 | 1,41 | 1,35 | 1,28 |
| | 25 | SHC | 1,81 | 1,70 | 1,66 | 1,61 | 1,55 | 1,47 |
| | 27 | SHC | 2,02 | 1,90 | 1,85 | 1,80 | 1,74 | 1,67 |
| | 29 | SHC | 2,23 | 2,10 | 2,04 | 1,99 | 1,93 | 1,86 |
| 19 | | TC | 2,65 | 2,50 | 2,42 | 2,30 | 2,16 | 1,99 |
| | | CM | 0,72 | 0,75 | 0,78 | 0,80 | 0,83 | 0,85 |
| | 21 | SHC | 1,17 | 1,10 | 1,06 | 1,01 | 0,95 | 0,88 |
| | 23 | SHC | 1,38 | 1,29 | 1,26 | 1,21 | 1,15 | 1,08 |
| | 25 | SHC | 1,59 | 1,48 | 1,45 | 1,40 | 1,34 | 1,27 |
| | 27 | SHC | 1,79 | 1,67 | 1,64 | 1,67 | 1,53 | 1,46 |
| | 29 | SHC | 2,00 | 1,85 | 1,83 | 1,78 | 1,73 | 1,65 |
| 21 | | TC | 2,78 | 2,65 | 2,56 | 2,44 | 2,29 | 2,11 |
| | | CM | 0,74 | 0,77 | 0,80 | 0,82 | 0,85 | 0,88 |
| | 23 | SHC | 1,14 | 1,08 | 1,05 | 1,00 | 0,94 | 0,87 |
| | 25 | SHC | 1,35 | 1,27 | 1,24 | 1,19 | 1,13 | 1,06 |
| | 27 | SHC | 1,56 | 1,46 | 1,43 | 1,38 | 1,33 | 1,25 |
| | 29 | SHC | 1,77 | 1,64 | 1,62 | 1,58 | 1,52 | 1,45 |
| 23 | | TC | 2,97 | 2,80 | 2,71 | 2,56 | 2,40 | 2,23 |
| | | CM | 0,76 | 0,79 | 0,82 | 0,85 | 0,87 | 0,90 |
| | 25 | SHC | 1,12 | 1,05 | 1,02 | 0,96 | 0,90 | 0,84 |
| | 27 | SHC | 1,32 | 1,23 | 1,21 | 1,15 | 1,09 | 1,03 |
| | 29 | SHC | 1,53 | 1,41 | 1,40 | 1,35 | 1,29 | 1,23 |
| 31 | SHC | 1,74 | 1,62 | 1,60 | 1,54 | 1,48 | 1,42 | |

TC: TOTAL COOLING CAPACITY kW

SHC: SENSIBLE HEAT CAPACITY kW

CM: COMPRESSOR INPUT kW

RATING CONDITIONS

Cooling: Indoor air temperature 27°C D.B. / 19°C W.B.

Outdoor air temperature 35°C D.B. / 24°C W.B.

NOTE: Data referred to AWR608HL

OUTDOOR UNIT: **AER609SH**
 INDOOR UNIT: **AWR609HL**

220 - 240V ~ 50Hz

| | | | | | | | | |
|-------------------|------|----------|--------------------------|------|---------|------|------|------|
| RATING CAPACITY | | 2,50 kW | moisture removal | | 1,1 l/h | | | |
| COMP. POWER INPUT | | 0,963 kW | max comp input | | 1,14 kW | | | |
| AIR FLOW RATE | | 450 m³/h | | | | | | |
| EVAPORATOR | | | CONDENSER | | | | | |
| ENT.TEMP. °C | | | OUTDOOR AMBIENT TEMP. °C | | | | | |
| W.B. | D.B. | | 20 | 25 | 30 | 35 | 40 | 43 |
| 15 | | TC | 2,53 | 2,37 | 2,30 | 2,19 | 2,05 | 1,90 |
| | | CM | 0,73 | 0,79 | 0,85 | 0,91 | 0,96 | 1,02 |
| | 21 | SHC | 1,75 | 1,62 | 1,59 | 1,54 | 1,47 | 1,40 |
| | 23 | SHC | 1,98 | 1,84 | 1,80 | 1,75 | 1,68 | 1,61 |
| | 25 | SHC | 2,20 | 2,05 | 2,01 | 1,96 | 1,89 | 1,82 |
| | 27 | SHC | 2,43 | 2,27 | 2,22 | 2,17 | 2,05 | 1,90 |
| | 29 | SHC | 2,53 | 2,37 | 2,30 | 2,19 | 2,05 | 1,90 |
| 17 | | TC | 2,71 | 2,57 | 2,47 | 2,35 | 2,21 | 2,03 |
| | | CM | 0,76 | 0,81 | 0,87 | 0,93 | 0,99 | 1,05 |
| | 21 | SHC | 1,51 | 1,42 | 1,38 | 1,33 | 1,26 | 1,18 |
| | 23 | SHC | 1,74 | 1,63 | 1,59 | 1,53 | 1,47 | 1,39 |
| | 25 | SHC | 1,97 | 1,85 | 1,80 | 1,74 | 1,68 | 1,60 |
| | 27 | SHC | 2,19 | 2,06 | 2,01 | 1,95 | 1,89 | 1,81 |
| | 29 | SHC | 2,42 | 2,28 | 2,22 | 2,16 | 2,10 | 2,02 |
| 19 | | TC | 2,88 | 2,72 | 2,63 | 2,50 | 2,35 | 2,16 |
| | | CM | 0,78 | 0,84 | 0,90 | 0,96 | 1,02 | 1,08 |
| | 21 | SHC | 1,27 | 1,19 | 1,15 | 1,10 | 1,03 | 0,96 |
| | 23 | SHC | 1,50 | 1,40 | 1,36 | 1,31 | 1,24 | 1,17 |
| | 25 | SHC | 1,73 | 1,60 | 1,57 | 1,52 | 1,46 | 1,38 |
| | 27 | SHC | 1,94 | 1,81 | 1,78 | 1,73 | 1,66 | 1,59 |
| | 29 | SHC | 2,17 | 2,01 | 1,99 | 1,93 | 1,88 | 1,79 |
| 21 | | TC | 3,03 | 2,88 | 2,78 | 2,65 | 2,49 | 2,29 |
| | | CM | 0,82 | 0,88 | 0,94 | 0,99 | 1,05 | 1,11 |
| | 23 | SHC | 1,24 | 1,18 | 1,14 | 1,08 | 1,02 | 0,94 |
| | 25 | SHC | 1,47 | 1,38 | 1,34 | 1,29 | 1,23 | 1,15 |
| | 27 | SHC | 1,70 | 1,58 | 1,55 | 1,50 | 1,44 | 1,36 |
| | 29 | SHC | 1,92 | 1,79 | 1,76 | 1,71 | 1,65 | 1,57 |
| | 31 | SHC | 2,14 | 2,00 | 1,97 | 1,92 | 1,86 | 1,78 |
| 23 | | TC | 3,23 | 3,04 | 2,95 | 2,78 | 2,60 | 2,42 |
| | | CM | 0,85 | 0,91 | 0,97 | 1,02 | 1,08 | 1,14 |
| | 25 | SHC | 1,21 | 1,14 | 1,10 | 1,04 | 0,98 | 0,91 |
| | 27 | SHC | 1,44 | 1,34 | 1,31 | 1,25 | 1,18 | 1,12 |
| | 29 | SHC | 1,67 | 1,54 | 1,52 | 1,46 | 1,40 | 1,33 |
| | 31 | SHC | 1,89 | 1,76 | 1,73 | 1,67 | 1,60 | 1,54 |

TC: TOTAL COOLING CAPACITY kW
 SHC: SENSIBLE HEAT CAPACITY kW
 CM: COMPRESSOR INPUT kW

RATING CONDITIONS

Cooling: Indoor air temperature 27°C D.B. / 19°C W.B.
 Outdoor air temperature 35°C D.B. / 24°C W.B.

NOTE: Data referred to AWR608HL

OUTDOOR UNIT: **AER612SH**
 INDOOR UNIT: **AWR612HL**

220 - 240V ~ 50Hz

| | | | | | | | | | |
|-------------------|------|----------|--------------------------|------|----------|------|------|------|------|
| RATING CAPACITY | | 3,10 kW | moisture removal | | 1,5 l/h | | | | |
| COMP. POWER INPUT | | 1,206 kW | max comp input | | 1,426 kW | | | | |
| AIR FLOW RATE | | 470 m³/h | | | | | | | |
| EVAPORATOR | | | CONDENSER | | | | | | |
| ENT. TEMP. °C | | | OUTDOOR AMBIENT TEMP. °C | | | | | | |
| W.B. | D.B. | | 20 | 25 | 30 | 35 | 40 | 43 | |
| 15 | | TC | 3,13 | 2,94 | 2,85 | 2,72 | 2,55 | 2,35 | |
| | | CM | 0,91 | 0,99 | 1,06 | 1,13 | 1,21 | 1,28 | |
| | 21 | SHC | 2,17 | 2,01 | 1,97 | 1,91 | 1,83 | 1,73 | |
| | 23 | SHC | 2,46 | 2,28 | 2,24 | 2,17 | 2,09 | 1,99 | |
| | 25 | SHC | 2,73 | 2,54 | 2,49 | 2,43 | 2,35 | 2,25 | |
| | 27 | SHC | 3,01 | 2,81 | 2,76 | 2,69 | 2,55 | 2,35 | |
| | 29 | SHC | 3,13 | 2,94 | 2,85 | 2,72 | 2,55 | 2,35 | |
| | 31 | SHC | 3,13 | 2,94 | 2,85 | 2,72 | 2,55 | 2,35 | |
| 17 | | TC | 3,35 | 3,18 | 3,06 | 2,91 | 2,74 | 2,52 | |
| | | CM | 0,95 | 1,02 | 1,10 | 1,17 | 1,24 | 1,32 | |
| | 21 | SHC | 1,87 | 1,76 | 1,71 | 1,64 | 1,56 | 1,46 | |
| | 23 | SHC | 2,16 | 2,03 | 1,97 | 1,90 | 1,82 | 1,73 | |
| | 25 | SHC | 2,44 | 2,30 | 2,23 | 2,16 | 2,08 | 1,98 | |
| | 27 | SHC | 2,72 | 2,56 | 2,49 | 2,42 | 2,34 | 2,24 | |
| | 29 | SHC | 3,00 | 2,83 | 2,75 | 2,68 | 2,60 | 2,50 | |
| | 31 | SHC | 3,27 | 3,09 | 3,01 | 2,91 | 2,74 | 2,52 | |
| 19 | | TC | 3,57 | 3,37 | 3,26 | 3,10 | 2,91 | 2,68 | |
| | | CM | 0,98 | 1,06 | 1,13 | 1,21 | 1,28 | 1,35 | |
| | 21 | SHC | 1,57 | 1,48 | 1,43 | 1,36 | 1,28 | 1,19 | |
| | 23 | SHC | 1,86 | 1,74 | 1,69 | 1,62 | 1,54 | 1,45 | |
| | 25 | SHC | 2,14 | 1,99 | 1,95 | 1,88 | 1,81 | 1,71 | |
| | 27 | SHC | 2,41 | 2,24 | 2,21 | 2,05 | 2,06 | 1,97 | |
| | 29 | SHC | 2,69 | 2,49 | 2,47 | 2,40 | 2,33 | 2,22 | |
| | 31 | SHC | 2,97 | 2,76 | 2,73 | 2,66 | 2,58 | 2,49 | |
| 21 | | TC | 3,75 | 3,57 | 3,45 | 3,29 | 3,09 | 2,84 | |
| | | CM | 1,02 | 1,10 | 1,17 | 1,24 | 1,32 | 1,39 | |
| | 23 | SHC | 1,54 | 1,46 | 1,41 | 1,34 | 1,26 | 1,17 | |
| | 25 | SHC | 1,82 | 1,71 | 1,66 | 1,60 | 1,52 | 1,43 | |
| | 27 | SHC | 2,10 | 1,96 | 1,93 | 1,86 | 1,79 | 1,68 | |
| | 29 | SHC | 2,38 | 2,21 | 2,18 | 2,12 | 2,04 | 1,95 | |
| | | 31 | SHC | 2,65 | 2,48 | 2,45 | 2,38 | 2,30 | 2,21 |
| 23 | | TC | 4,00 | 3,77 | 3,65 | 3,45 | 3,23 | 3,01 | |
| | | CM | 1,06 | 1,14 | 1,21 | 1,28 | 1,35 | 1,43 | |
| | 25 | SHC | 1,50 | 1,41 | 1,37 | 1,29 | 1,21 | 1,13 | |
| | 27 | SHC | 1,78 | 1,66 | 1,62 | 1,55 | 1,47 | 1,39 | |
| | 29 | SHC | 2,07 | 1,91 | 1,89 | 1,81 | 1,73 | 1,65 | |
| | | 31 | SHC | 2,35 | 2,18 | 2,15 | 2,07 | 1,99 | 1,91 |

TC: TOTAL COOLING CAPACITY kW
 SHC: SENSIBLE HEAT CAPACITY kW
 CM: COMPRESSOR INPUT kW


RATING CONDITIONS

Cooling: Indoor air temperature 27°C D.B. / 19°C W.B.

Outdoor air temperature 35°C D.B. / 24°C W.B.

NOTE: Data referred to AWR608HL

5-3 Heating Capacity

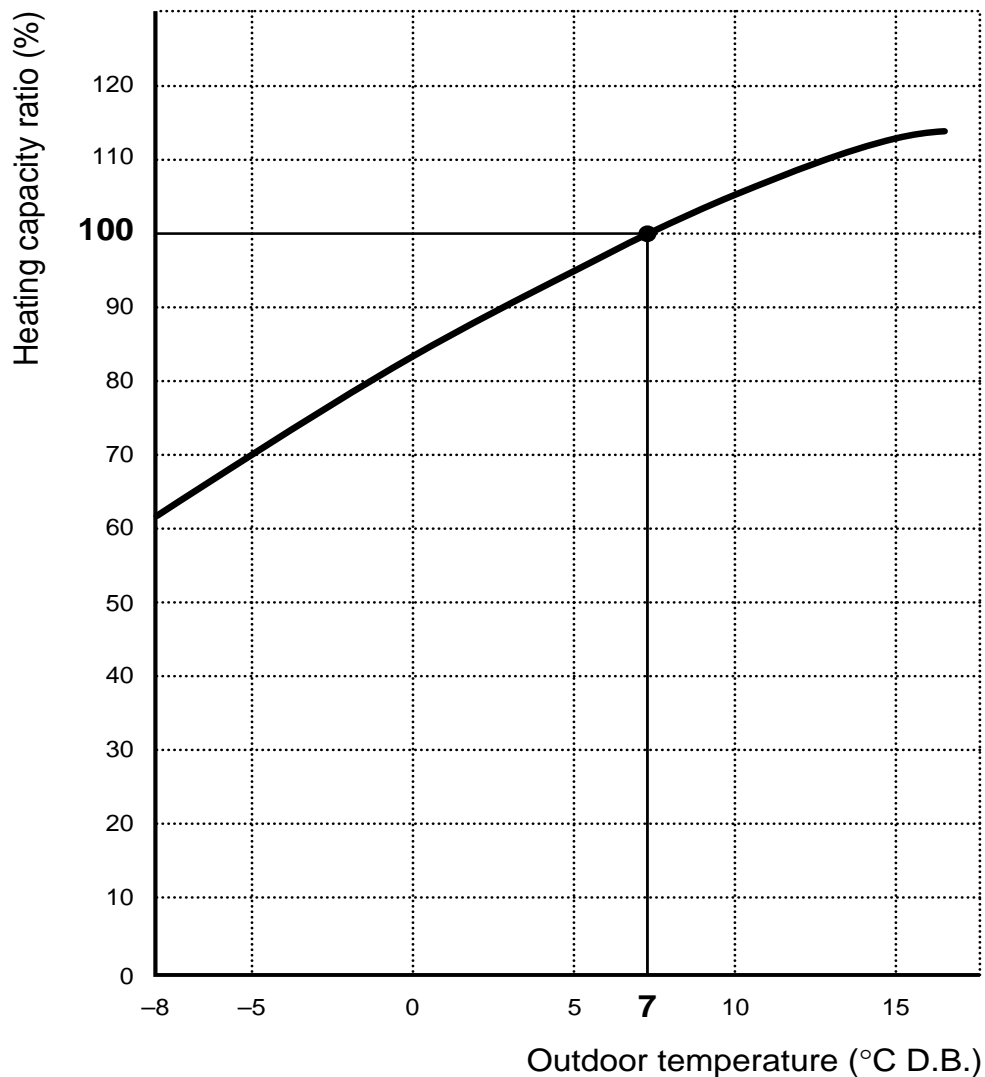

NOTE

- 1) ● ... Point of Rating condition
Black dot in the chart indicate the following rating condition.
Indoor : 20°C D.B.
Outdoor : 7°C D.B. / 6°C W.B.
- 2) Above characteristics indicate instantaneous operation, which does not take into consideration defrost operation.
- 3) Fan speed : High
- 4) Because this air conditioner heats a room by drawing in the heat of the outside air (heat pump system), the heating efficiency will fall off when the outdoor temperature is very low. If sufficient heat cannot be obtained with this air conditioner, use another heating appliance in conjunction with it.

NOTE: Data referred to Hi-Wall models AWR608HL
AWR609HL
AWR612HL

6. ELECTRICAL DATA

6-1 Electrical characteristics

OUTDOOR UNIT: **AER608SH**

COOLING

| | | | Indoor Unit | Outdoor unit | | Complete Unit |
|----------------------|---------------|----|--------------------|--------------|------------|---------------|
| | | | Fan Motor | Fan Motor | Compressor | |
| performance at | | | 230V 1-Phase 50 Hz | | | |
| Rating conditions | Running Amps. | A | 0,11 | 0,28 | 3,61 | 4,0 |
| | Power input | Kw | 0,025 | 0,063 | 0,802 | 0,890 |
| Full load conditions | Running Amps. | A | 0,11 | 0,28 | 4,11 | 4,5 |
| | Power input | Kw | 0,025 | 0,063 | 0,902 | 0,990 |

Rating Conditions: Indoor Air Temperature 27°C D.B. / 19°C W.B.
Outdoor Air Temperature 35°C D.B.

Full Load Conditions: Indoor Air Temperature 32°C D.B. / 23°C W.B.
Outdoor Air Temperature 43°C D.B.

HEATING

| | | | Indoor Unit | Outdoor unit | | Complete Unit |
|----------------------|---------------|----|--------------------|--------------|------------|---------------|
| | | | Fan Motor | Fan Motor | Compressor | |
| performance at | | | 230V 1-Phase 50 Hz | | | |
| Rating conditions | Running Amps. | A | 0,11 | 0,28 | 3,61 | 4,0 |
| | Power input | Kw | 0,025 | 0,063 | 0,772 | 0,860 |
| Full load conditions | Running Amps. | A | 0,11 | 0,28 | 3,91 | 4,3 |
| | Power input | Kw | 0,025 | 0,063 | 0,812 | 0,900 |

Rating Conditions: Indoor Air Temperature 20°C D.B.
Outdoor Air Temperature 7°C D.B. / 6°C W.B.

Full Load Conditions: Indoor Air Temperature 27°C D.B.
Outdoor Air Temperature 24°C D.B. / 18°C W.B.

NOTE: Data referred to indoor unit AWR608HL model.
For other indoor unit models there could be some differences.

OUTDOOR UNIT:

AER609SH

COOLING

| | | | Indoor Unit | Outdoor unit | | Complete Unit |
|----------------------|---------------|----|--------------------|--------------|------------|---------------|
| | | | Fan Motor | Fan Motor | Compressor | |
| performance at | | | 230V 1-Phase 50 Hz | | | |
| Rating conditions | Running Amps. | A | 0,12 | 0,28 | 4,3 | 4,7 |
| | Power input | Kw | 0,027 | 0,063 | 0,963 | 1,040 |
| Full load conditions | Running Amps. | A | 0,12 | 0,28 | 5,1 | 5,5 |
| | Power input | Kw | 0,027 | 0,063 | 1,140 | 1,230 |

Rating Conditions: Indoor Air Temperature 27°C D.B. / 19°C W.B.
 Outdoor Air Temperature 35°C D.B.

Full Load Conditions: Indoor Air Temperature 32°C D.B. / 23°C W.B.
 Outdoor Air Temperature 43°C D.B.

HEATING

| | | | Indoor Unit | Outdoor unit | | Complete Unit |
|----------------------|---------------|----|--------------------|--------------|------------|---------------|
| | | | Fan Motor | Fan Motor | Compressor | |
| performance at | | | 230V 1-Phase 50 Hz | | | |
| Rating conditions | Running Amps. | A | 0,12 | 0,28 | 4,3 | 4,7 |
| | Power input | Kw | 0,027 | 0,063 | 0,973 | 1,050 |
| Full load conditions | Running Amps. | A | 0,12 | 0,28 | 4,8 | 5,2 |
| | Power input | Kw | 0,027 | 0,063 | 1,080 | 1,170 |

Rating Conditions: Indoor Air Temperature 20°C D.B.
 Outdoor Air Temperature 7°C D.B. / 6°C W.B.

Full Load Conditions: Indoor Air Temperature 27°C D.B.
 Outdoor Air Temperature 24°C D.B. / 18°C W.B.

NOTE: Data referred to indoor unit AWR609HL model.
 For other indoor unit models there could be some differences.

OUTDOOR UNIT:

AER612SH

COOLING

| | | | Indoor Unit | Outdoor unit | | Complete Unit |
|----------------------|---------------|----|--------------------|--------------|------------|---------------|
| | | | Fan Motor | Fan Motor | Compressor | |
| performance at | | | 230V 1-Phase 50 Hz | | | |
| Rating conditions | Running Amps. | A | 0,13 | 0,28 | 5,79 | 6,2 |
| | Power input | Kw | 0,031 | 0,063 | 1,206 | 1,300 |
| Full load conditions | Running Amps. | A | 0,13 | 0,28 | 6,79 | 7,2 |
| | Power input | Kw | 0,031 | 0,063 | 1,426 | 1,520 |

Rating Conditions: Indoor Air Temperature 27°C D.B. / 19°C W.B.
Outdoor Air Temperature 35°C D.B.

Full Load Conditions: Indoor Air Temperature 32°C D.B. / 23°C W.B.
Outdoor Air Temperature 43°C D.B.

HEATING


| | | | Indoor Unit | Outdoor unit | | Complete Unit |
|----------------------|---------------|----|--------------------|--------------|------------|---------------|
| | | | Fan Motor | Fan Motor | Compressor | |
| performance at | | | 230V 1-Phase 50 Hz | | | |
| Rating conditions | Running Amps. | A | 0,13 | 0,28 | 6,19 | 6,6 |
| | Power input | Kw | 0,031 | 0,063 | 1,306 | 1,400 |
| Full load conditions | Running Amps. | A | 0,13 | 0,28 | 6,89 | 7,3 |
| | Power input | Kw | 0,031 | 0,063 | 1,346 | 1,440 |

Rating Conditions: Indoor Air Temperature 20°C D.B.
Outdoor Air Temperature 7°C D.B. / 6°C W.B.


Full Load Conditions: Indoor Air Temperature 27°C D.B.
Outdoor Air Temperature 24°C D.B. / 18°C W.B.

NOTE: Data referred to indoor unit AWR612HL model.
For other indoor unit models there could be some differences.

6-2 Electric Wiring Diagram

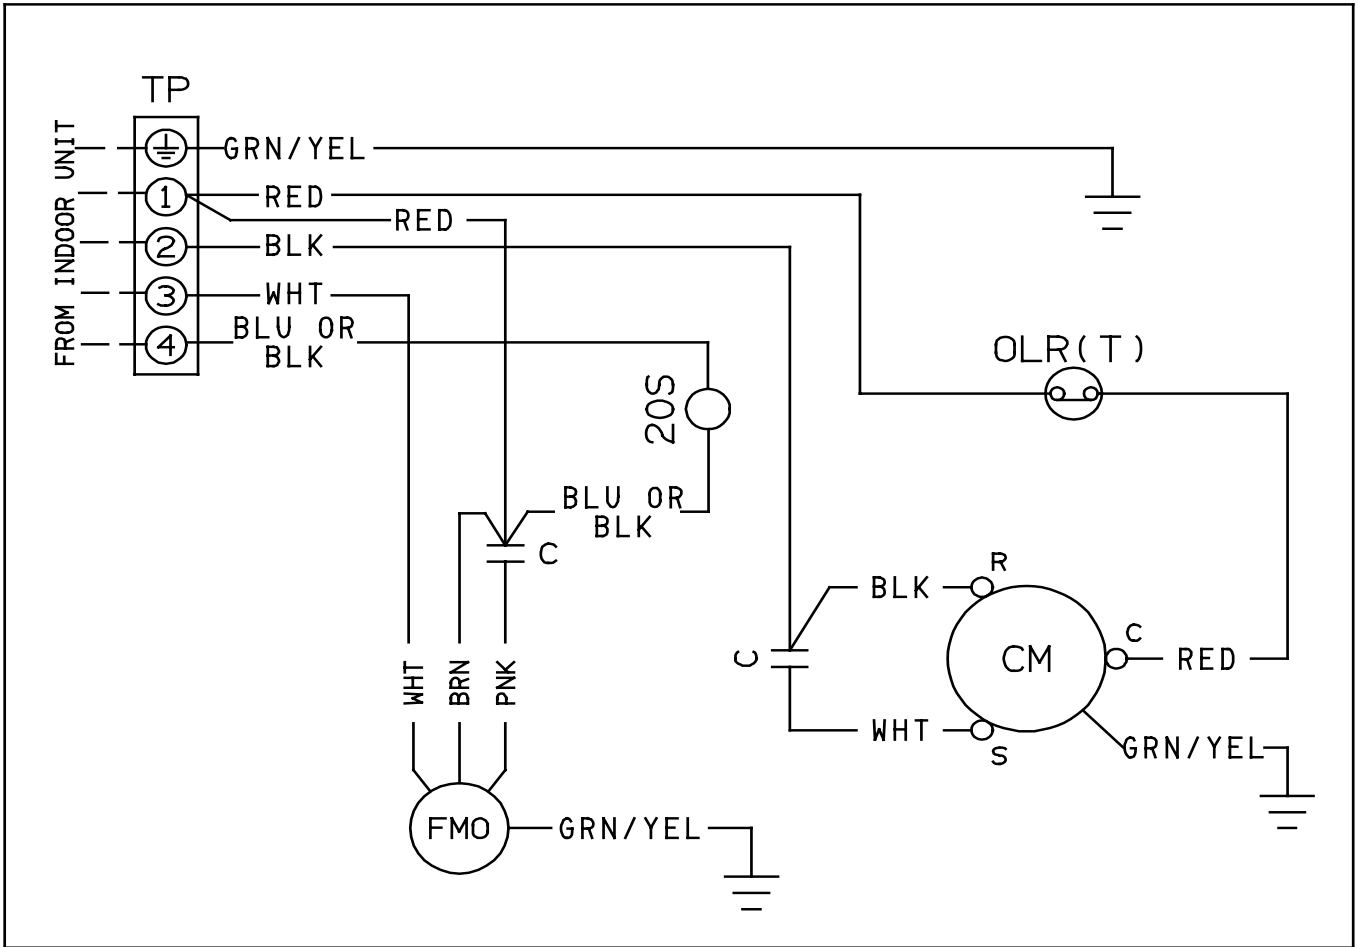

6-3 System Wiring Diagram

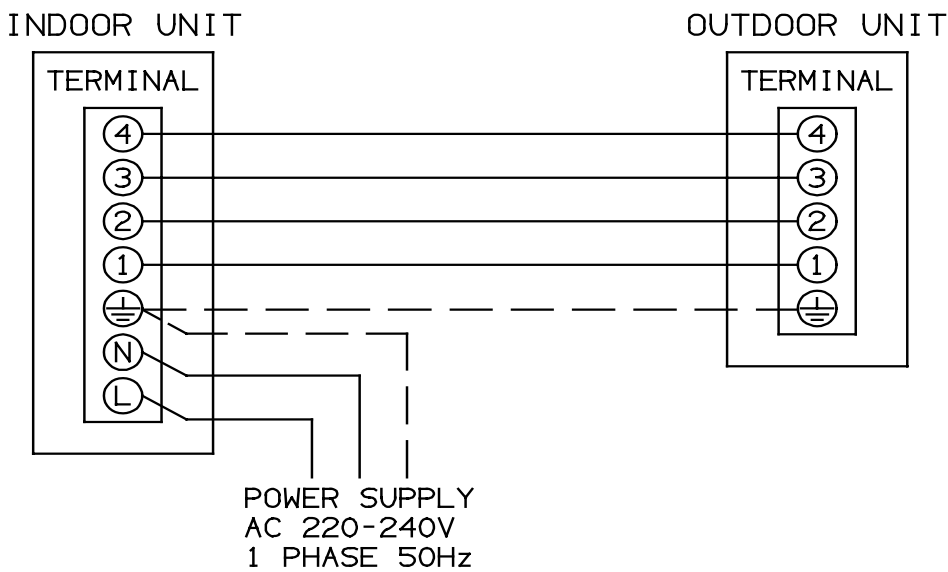

argoclima s.p.a.

Via Varese, 90 - 21013 Gallarate - Va - Italy
Tel. +39 0331 755111 - Fax +39 0331 776240
www.argoclima.it